

LED Flexible Back Lighting Panel

Specification Sheet

236501



APPLICATIONS



- Back Lighting
- Retail
- Commercial
- Advertising
- Specialty
- Signage

FEATURES

- 160° Lens
- 1" Strips
- Can be cut and customized
- Linkable

SPECIFICATIONS

Size: 480x240mm
 Colour: 2700-6500K
 Material: Flexible
 Luminous Flux: 3200 lms/sheet
 Lifespan: 50,000 hours
 LEDs: 98 pcs, per 480mm, 7 pcs per inch-wide section
 Remark: Linkable
 Lumens per Watt: 34lms/watt per 480mm

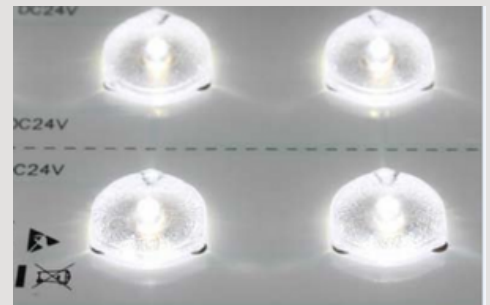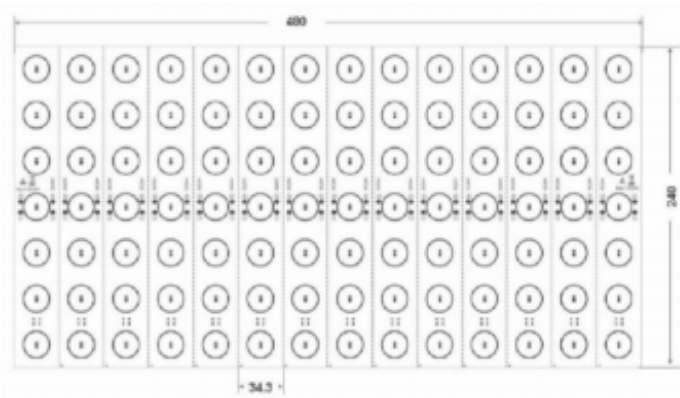

BENEFITS

- Even light cast
- No hot spots
- Can get media within 1" of the light source

POWER ENVIRONMENT

Input Voltage: 24 VDC
 Total Power Consumption: 34W per sheet

WORKING ENVIRONMENT

Temperature: -20°C to +35°C
 Indoor/Outdoor, Covered



LED Flexible Back Lighting Panel

Specification Sheet

236501



APPLICATIONS

- Back Lighting
- Retail
- Commercial
- Advertising
- Specialty
- Signage

FEATURES

- 160° Lens
- Cuttable every 48mm square
- Can be cut and customized
- Linkable

SPECIFICATIONS

Size: 480x240mm
 Colour: 2700-6500K
 Material: Flexible
 Luminous Flux: 3200 lms/sheet
 Lifespan: 50,000 hours
 LEDs: 50 pcs, per 480mm
 Remark: Linkable
 Lumens per Watt: 34lms/watt per 480mm



BENEFITS

- Even light cast
- No hot spots
- Can get media within 1" of the light source

POWER ENVIRONMENT

Input Voltage: 24 VDC
 Total Power Consumption: 34W per sheet

WORKING ENVIRONMENT

Temperature: -20°C to +35°C
 Indoor/Outdoor, Covered

