


851104-RGB60-VDC





Powered by the standard 5050 SMD LED Chip, this flexible LED is great for general lighting applications. Available in a wide range of LEDs/m and voltages.

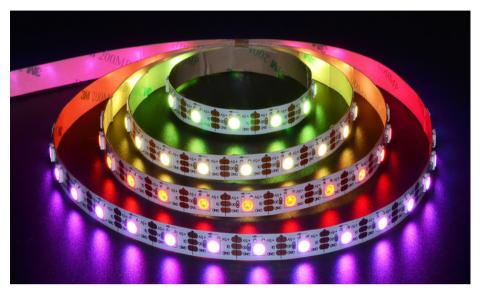

Experience the brilliance of Zortech LED's ALO4 kit, featuring the RGB60 (5050 SMD LED, 60 LED/m) strip and ALO4 aluminum extrusion. Effortlessly combine colourful RGB LED illumination with the sleek ALO4 square extrusion for a stunning lighting solution that adds both style and efficiency to any setting.

- ·Standard Semi-Clear (Frosted) Cover, other options available
- •Comes with 2 end caps and 2 mounting clips, other mounting options are available upon request
- ·Variety of lead and wire options, at additional cost

RGB Colour Spectrum

Lens Options







Mounting Options









Product Details

Part Number	RGB60	
Width	10mm wide, 5m spool (RGB60)	
LED Count/m	60 LED/m (RGB60)	
Cuttable Length	50mm (RGB60)	
CRI	>70+ (Standard)	
IP Rating	IP20, IP65, IP67, IP68)	
Lifespan	50,000 hours (with recommended mounting to metal or glass surface)	

Lumens R120/G240/B180 lms/m (RGB60)

Flectrical

	Electrical		
	Input Voltage	12 VDC (Standard) 24 VDC (Standard)	
	Power Consumption	14.4 W/m (RGB60)	
	Wire	Locking Tab, Small Locking Tab, Blunt Wire	